



SAAMI New Cartridge & Chamber Introduction 20 Nosler

ISSUED: 01/17/2017

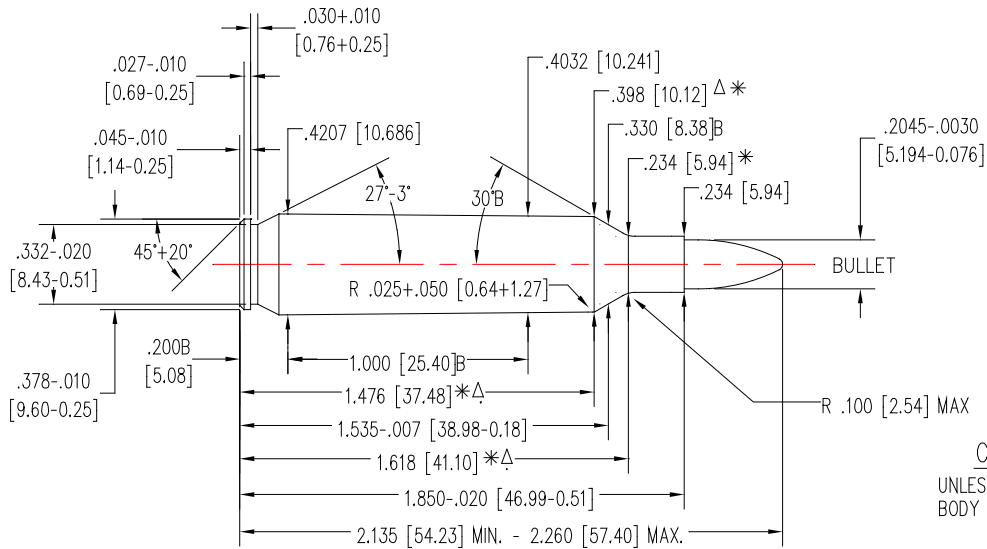

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA. $-.008$ [.20]

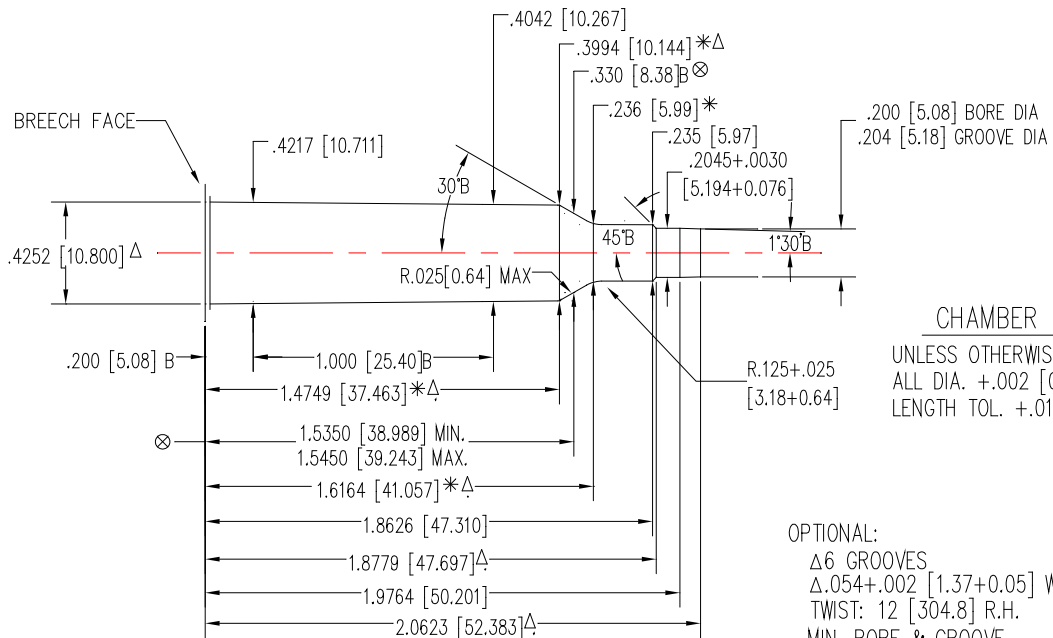

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA. $+.002$ [0.05]
LENGTH TOL. $+.015$ [0.38]

OPTIONAL:
 Δ 6 GROOVES
 Δ .054 $+.002$ [1.37 $+0.05$] WIDE
 TWIST: 12 [304.8] R.H.
 MIN. BORE & GROOVE
 AREA: .0321 SQ. IN. [20.710 mm²]

NOTE:
 B=BASIC
 [XX.XX]=MILLIMETERS
 \otimes = HEADSPACE DIMENSION
 Δ = REFERENCE DIMENSION
 * DIMENSIONS ARE TO INTERSECTION OF LINES
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Pressure: 55,000 psi
Velocity: 32 gr. bullet at 4,100 fps

S A A M I