



SAAMI New Cartridge & Chamber Introduction 22 Nosler

ISSUED 01/17/17

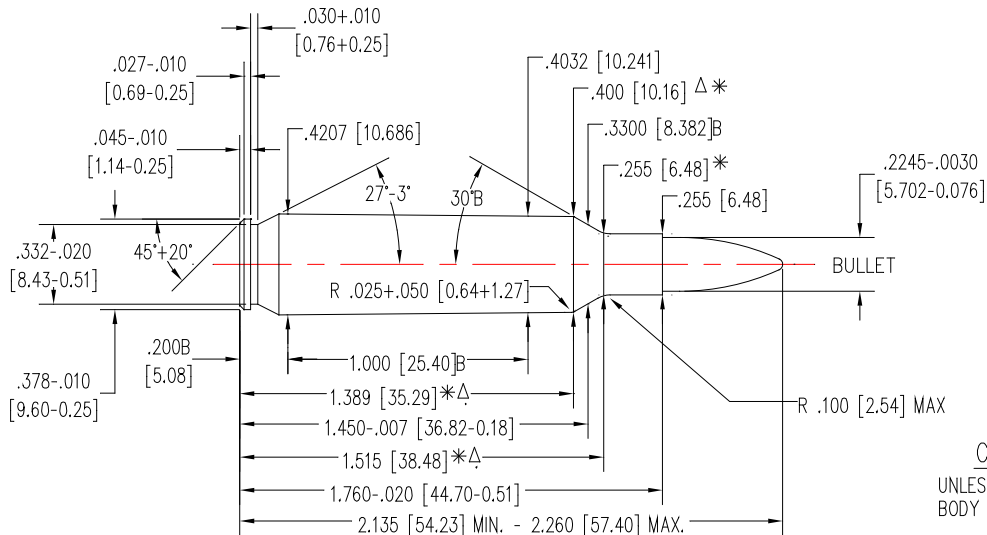

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA. $-.008$ [.20]

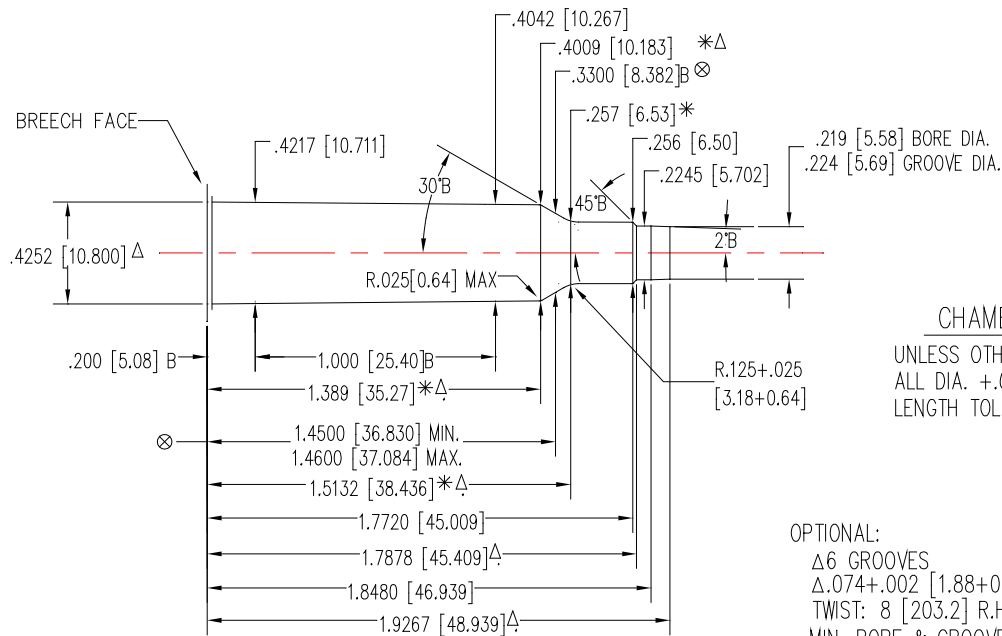

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA. $+.002$ [0.05]
LENGTH TOL. $+.015$ [0.38]

OPTIONAL:
Δ6 GROOVES
Δ.074+.002 [1.88+0.05] WIDE
TWIST: 8 [203.2] R.H.
MIN. BORE & GROOVE
AREA: .0388 SQ. IN. [25.032 mm²]

Pressure: 55,000 psi
Velocity: 55 gr. bullet at 3,500 fps

NOTE:
B=BASIC
[XX.XX]=MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

S A A M I