Maximum Average Pressure (MAP)* = 65,000 psi
Crusher pressures not established.
* Refer to ANSI/SAAMI Z299.4 for pressure guideline interpretation description.

Instrumental Velocity: 250-gr @ 2,850 fps

ISSUED: - -/- -/2015

33 NOSLER [33 NOSLER]

REVISED: - -/- -/- - - -

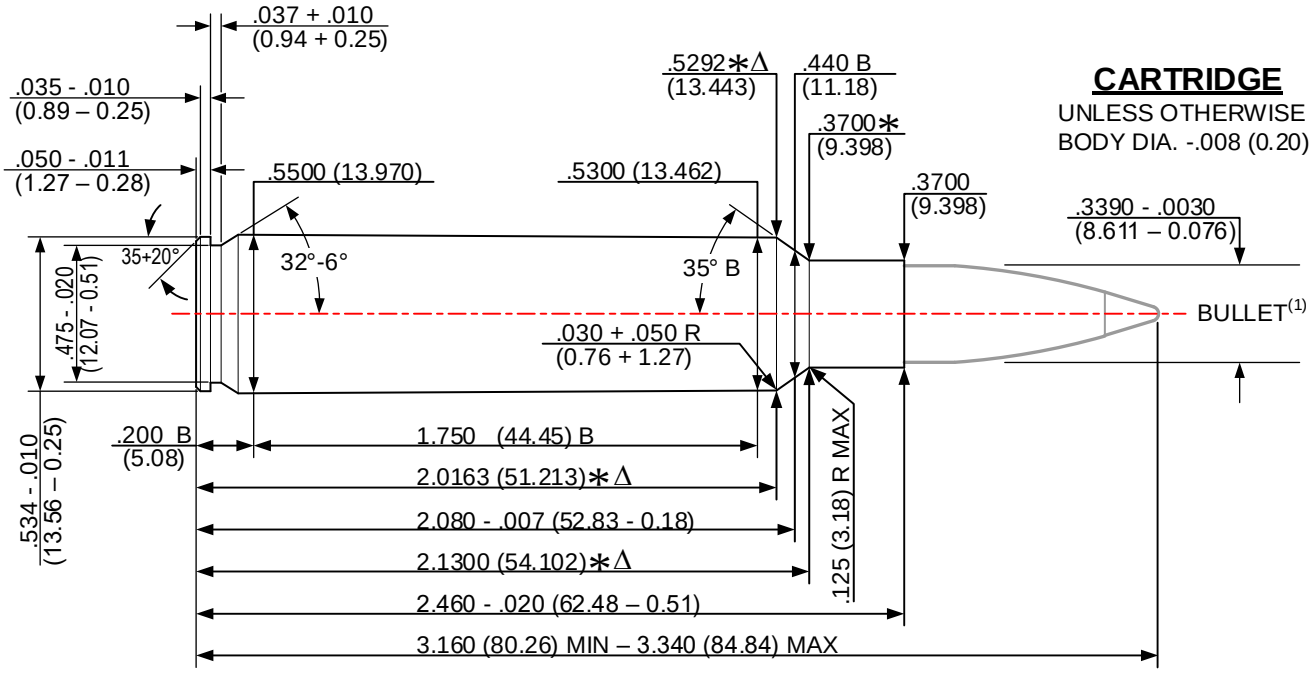

CARTRIDGE

UNLESS OTHERWISE NOTED
BODY DIA. -.008 (0.20)

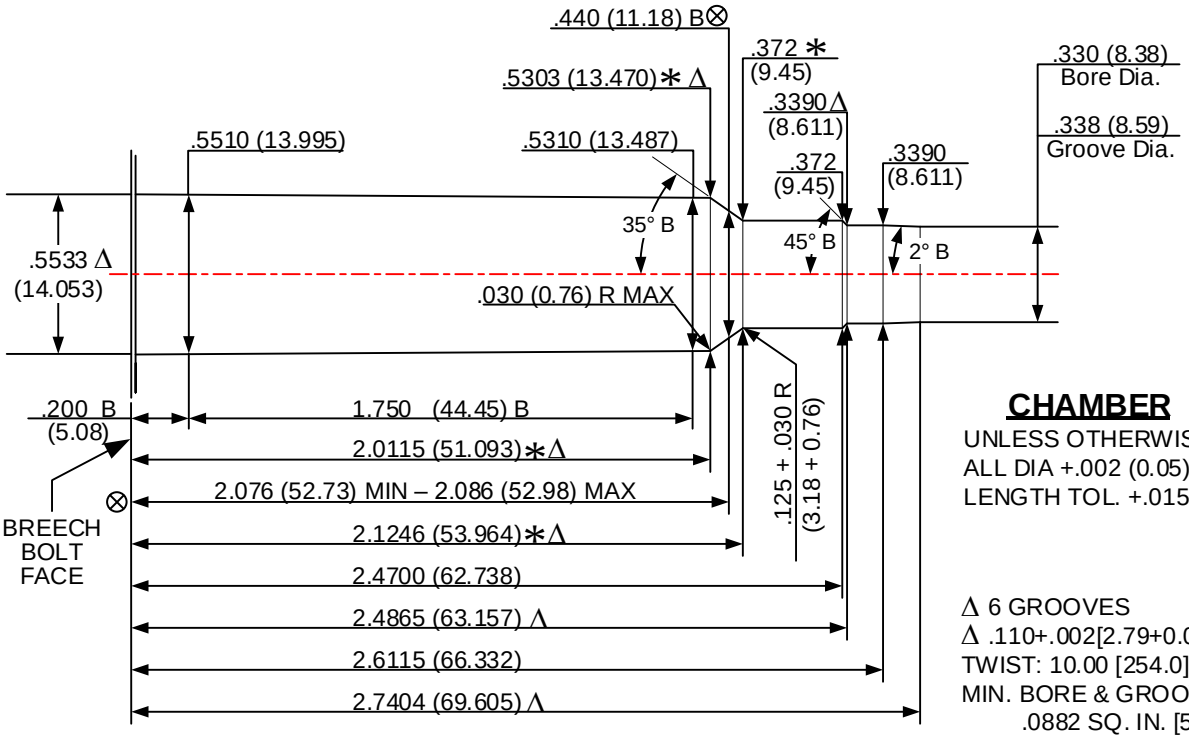

CHAMBER

UNLESS OTHERWISE NOTED
ALL DIA +.002 (0.05)
LENGTH TOL. +.015 (0.38)

Δ 6 GROOVES
Δ .110+.002[2.79+0.05] WIDE
TWIST: 10.00 [254.0] R.H. OPTIONAL
MIN. BORE & GROOVE AREA:
.0882 SQ. IN. [56.903 MM²]

DO NOT SCALE FROM DRAWING

NOTE:
B = BASIC
Δ = REFERENCE DIMENSION
(XX.XX) = MILLIMETERS
∗ = DIMENSIONS ARE TO INTERSECTION OF LINES
⊗ = HEADSPACE DIMENSION
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)
(1) – BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY

Copyright © Sporting Arms and Ammunition Manufacturers' Institute, Inc. All rights reserved. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher