

SAAMI New Cartridge & Chamber

Maximum Average Pressure (MAP)* = 55,000 psi

Instrumental Velocity: 55-gr @ 3,500 fps

Crusher pressure limits not established.

* Refer to ANSI/SAAMI Z299.4 for pressure guideline interpretation description.



ISSUED: 01/17/2017

22 NOSLER [22 NOSLER]

REVISED: 03/29/2022

CARTRIDGE

UNLESS OTHERWISE NOTED
BODY DIA. -.008 (0.20)

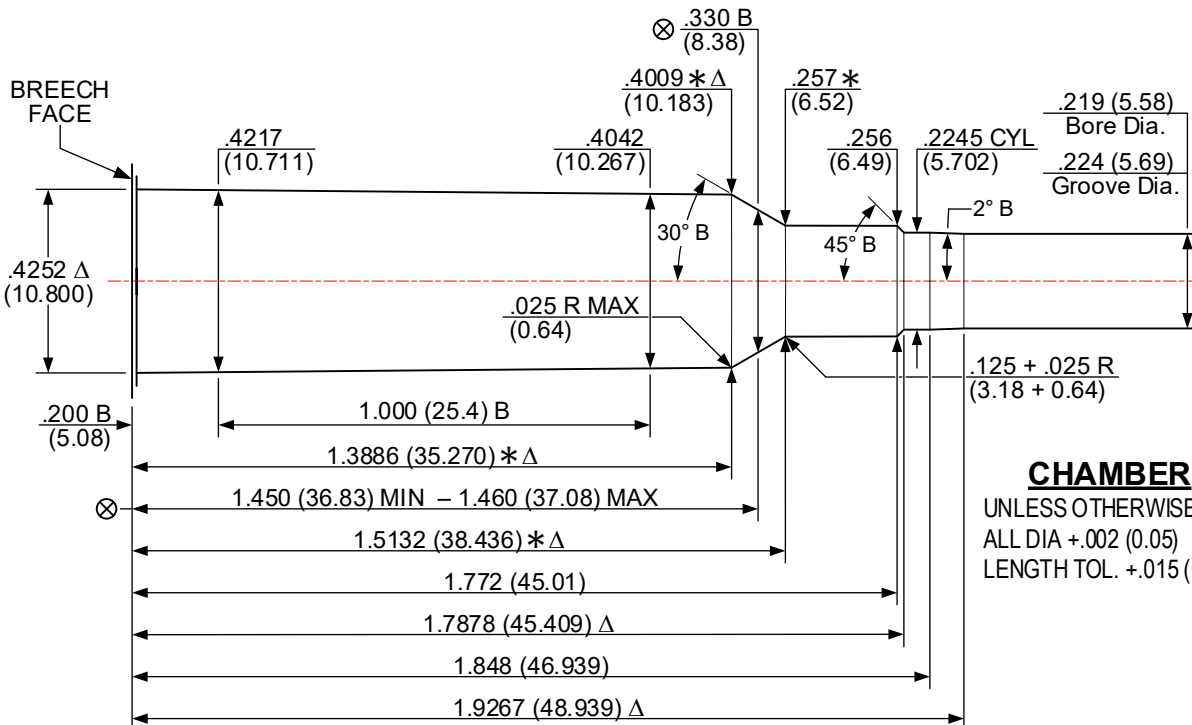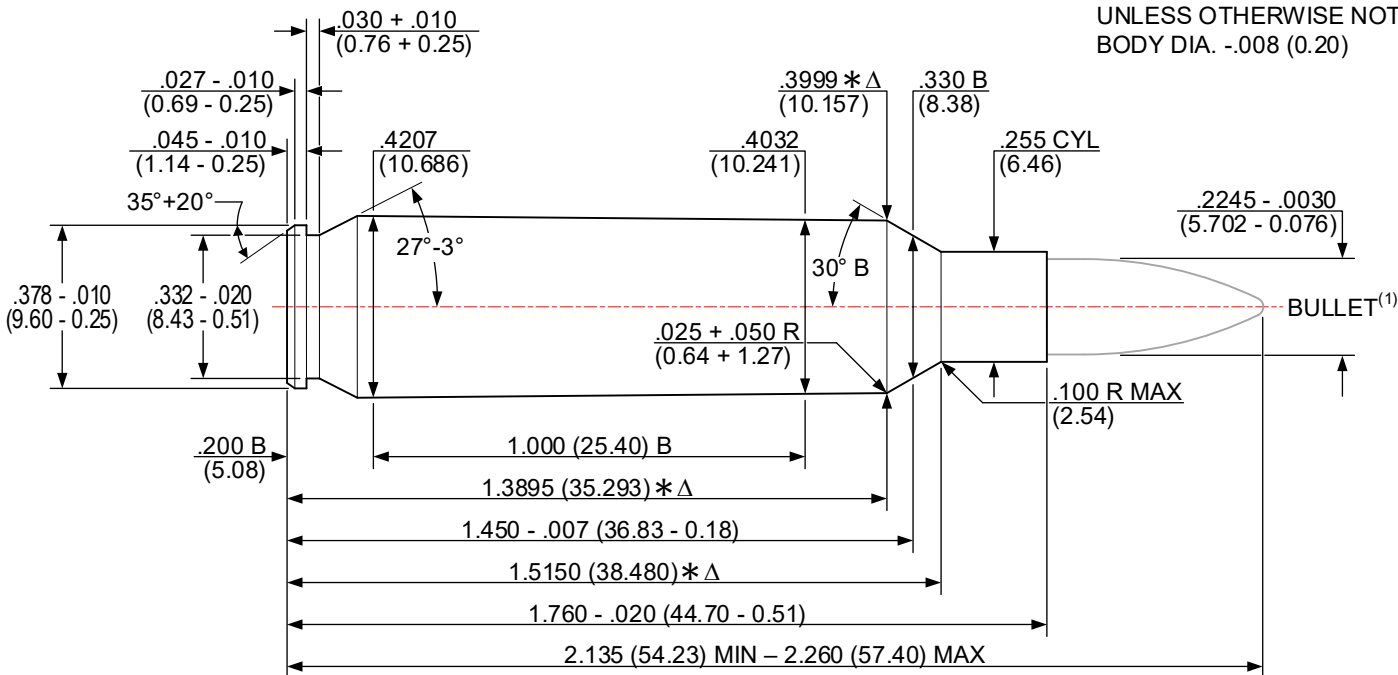

CHAMBER

UNLESS OTHERWISE NOTED
ALL DIA +.002 (0.05)
LENGTH TOL. +.015 (0.38)

Δ 6 GROOVES

Δ .074+.002 (1.88+0.05) WIDE

TWIST: 8.00 (203.2) R.H. OPTIONAL

MINIMUM BORE & GROOVE AREA: .0388 in² (25.032 mm²)

NOTE:

B = BASIC

(XX.XX) = MILLIMETERS

⊗ = HEADSPACE DIMENSION

Δ = REFERENCE DIMENSION

* = DIMENSIONS ARE TO INTERSECTION OF LINES

ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

(1) - BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY

DO NOT SCALE FROM DRAWING