



MAXIMUM CARTRIDGE / MINIMUM CHAMBER

This drawing corrects the dimensions on the rim of the cartridge only. No other performance or dimensional characteristics are changed.

30 LUGER (30 LUGER)
7.65mm (7.65mm)

ISSUED: 05/29/1979

REVISED: 03/27/2023

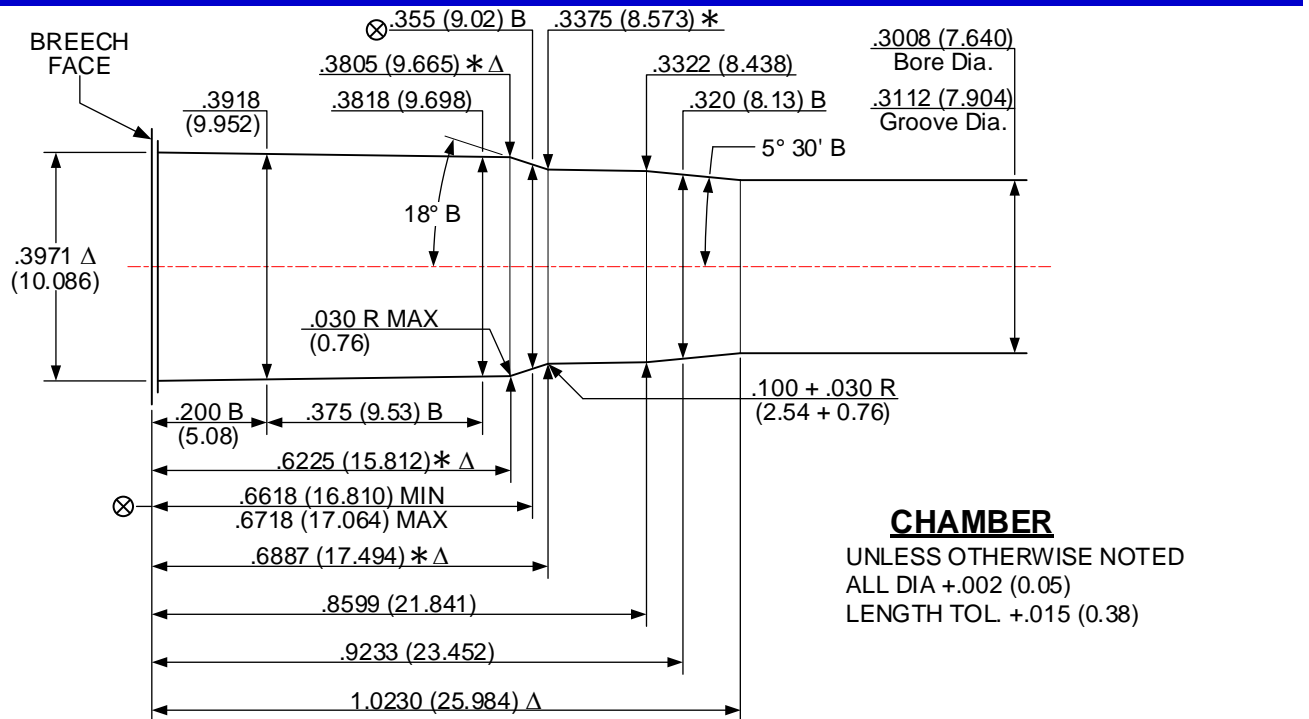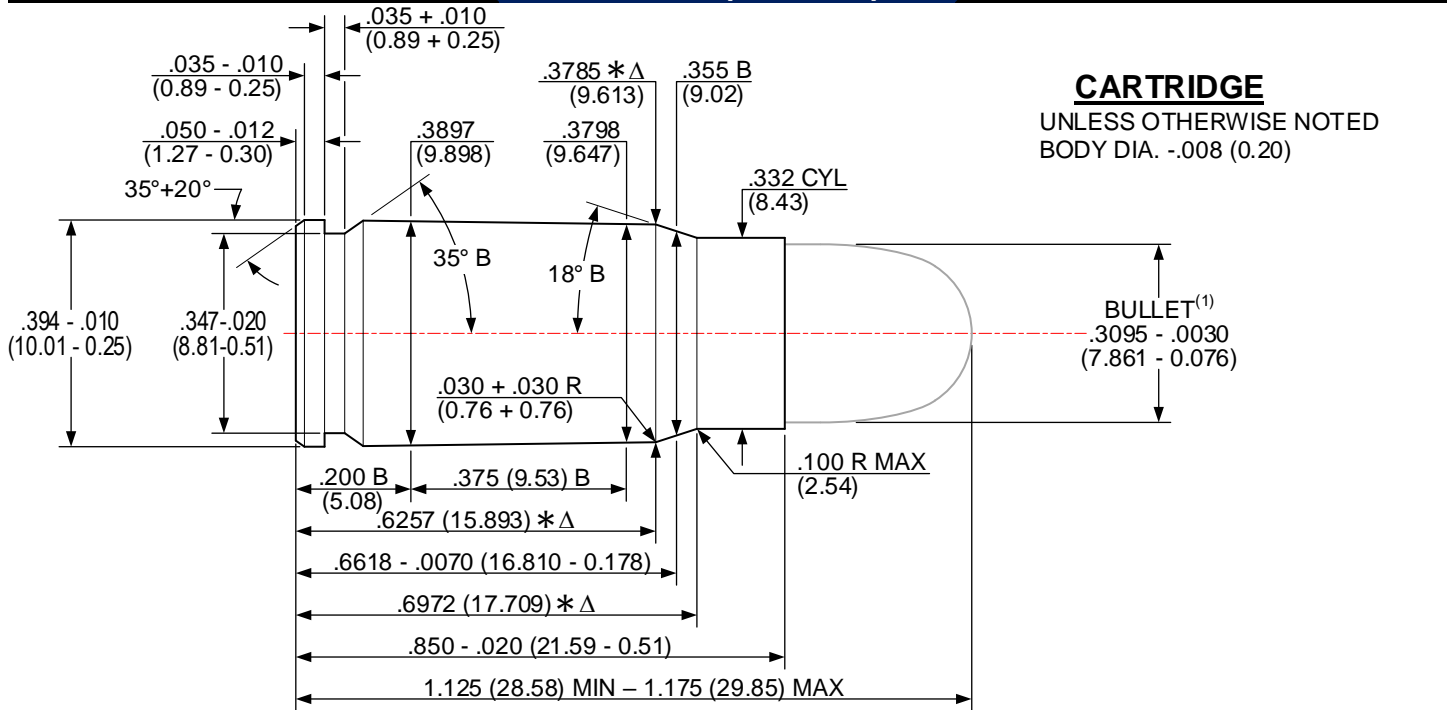

Δ 4 GROOVES TWIST: 11.00 (279.4) R.H. OPTIONAL
Δ .120+.002 (3.05+0.05) WIDE MINIMUM BORE & GROOVE AREA: .0736 in² (47.483 mm²)

NOTE:

B = BASIC (XX.XX) = MILLIMETERS ⊗ = HEAD SPACE DIMENSION
Δ = REFERENCE DIMENSION * = DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)
(1) - BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY

DO NOT SCALE FROM DRAWING