Maximum Average Pressure (MAP)* = 65,000 psi
Crusher pressure limits not established.
* Refer to SAAMI Z299.4 for pressure guideline interpretation description.

Instrumental Velocity: 150-gr @ 2,700 fps

CARTRIDGE & CHAMBER

ISSUED: 01/16/2022 — **6.8 TRUE VELOCITY COMPOSITE [6.8 TVC]** — **REVISED: 06/15/2022**

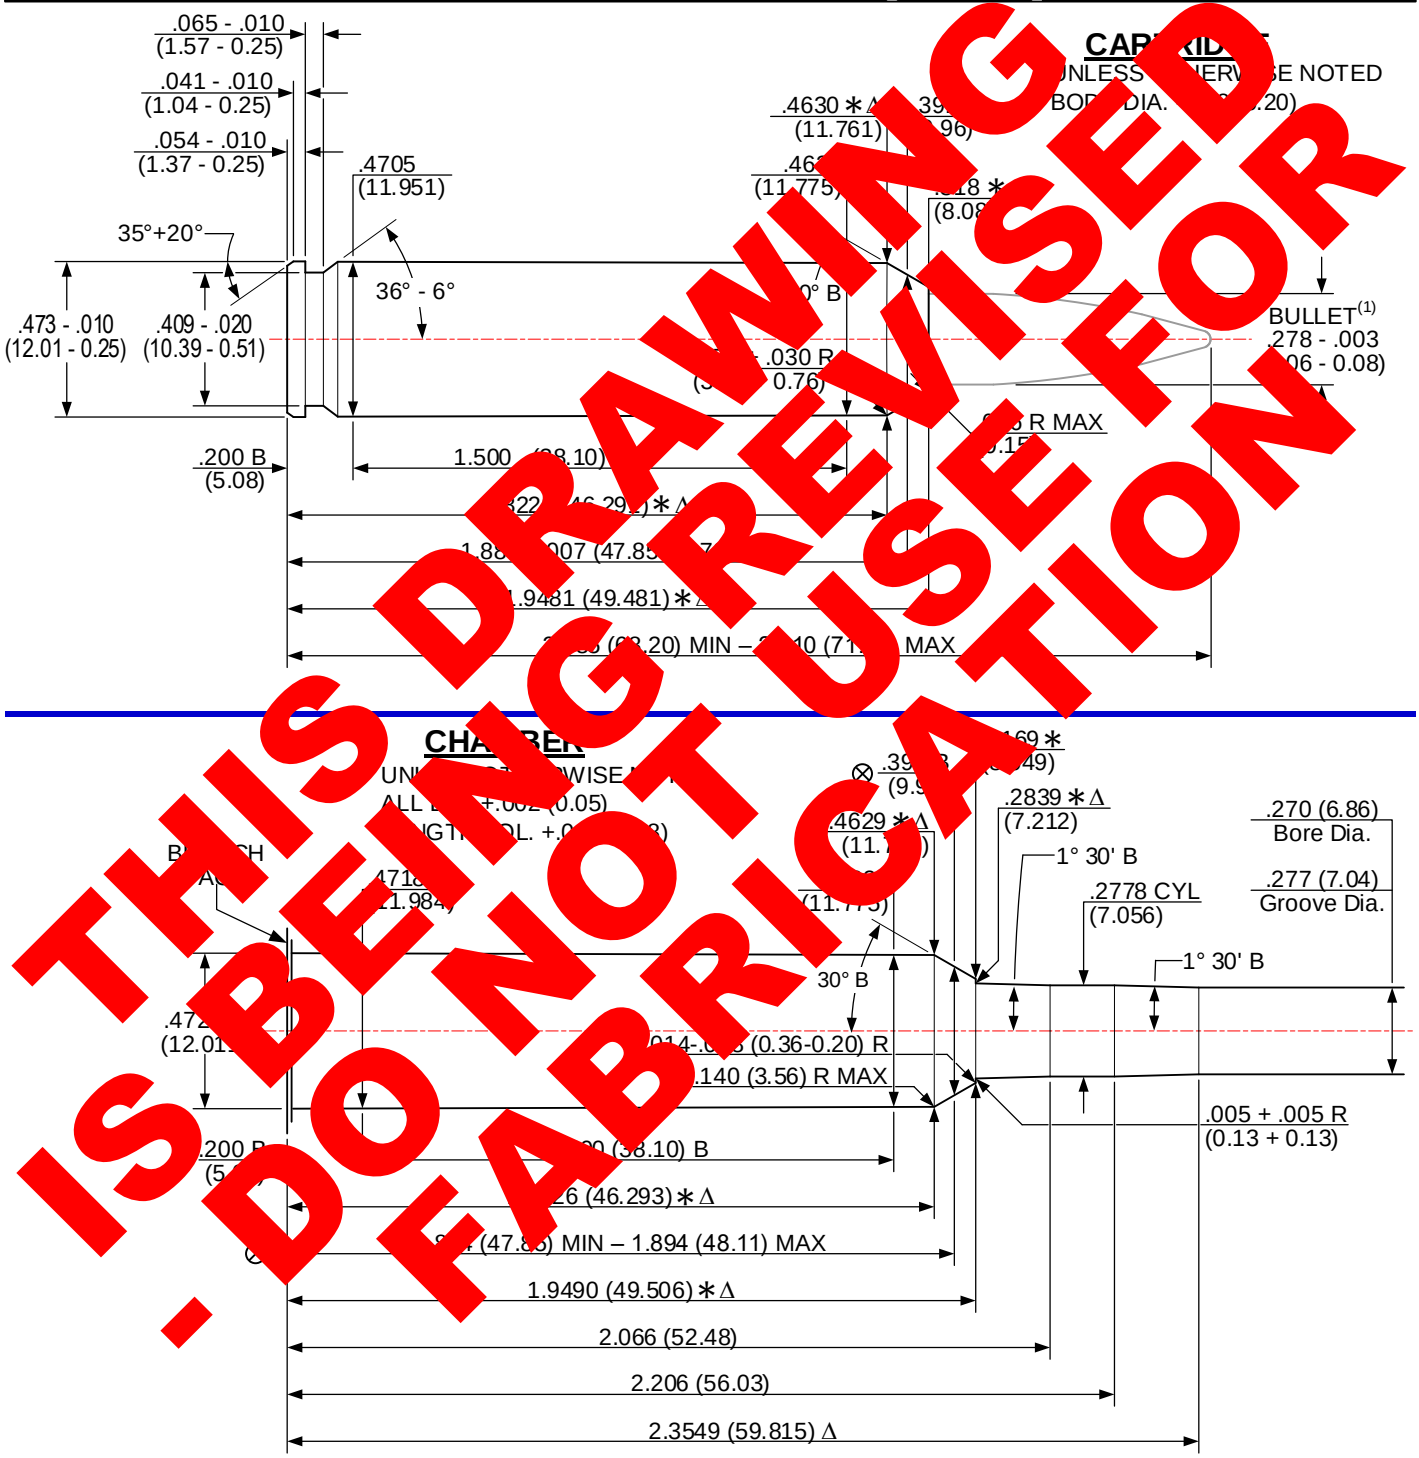

THIS DRAWING IS BEING REVISED . DO NOT USE FOR FABRICATION

Δ 5 GROOVES
Δ .120+.002 (3.05+0.05) WIDE

TWIST: 8.00 (203.2) R.H. OPTIONAL
MINIMUM BORE & GROOVE AREA: .0594 in² (38.322 mm²)

NOTE:
B = BASIC
Δ = REFERENCE DIMENSION
(XX.XX) = MILLIMETERS
∗ = DIMENSIONS ARE TO INTERSECTION OF LINES
⊗ = HEADSPACE DIMENSION
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)
(1) – BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY

DO NOT SCALE FROM DRAWING

Copyright © Sporting Arms and Ammunition Manufacturers' Institute, Inc. All rights reserved. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher