


**CFP&R: .5625-24-UNEF-2A; >.355 (9.02) / ≤.395 (10.03) BORE –  
 MUZZLE THREADS**

SHEET 1 OF 4

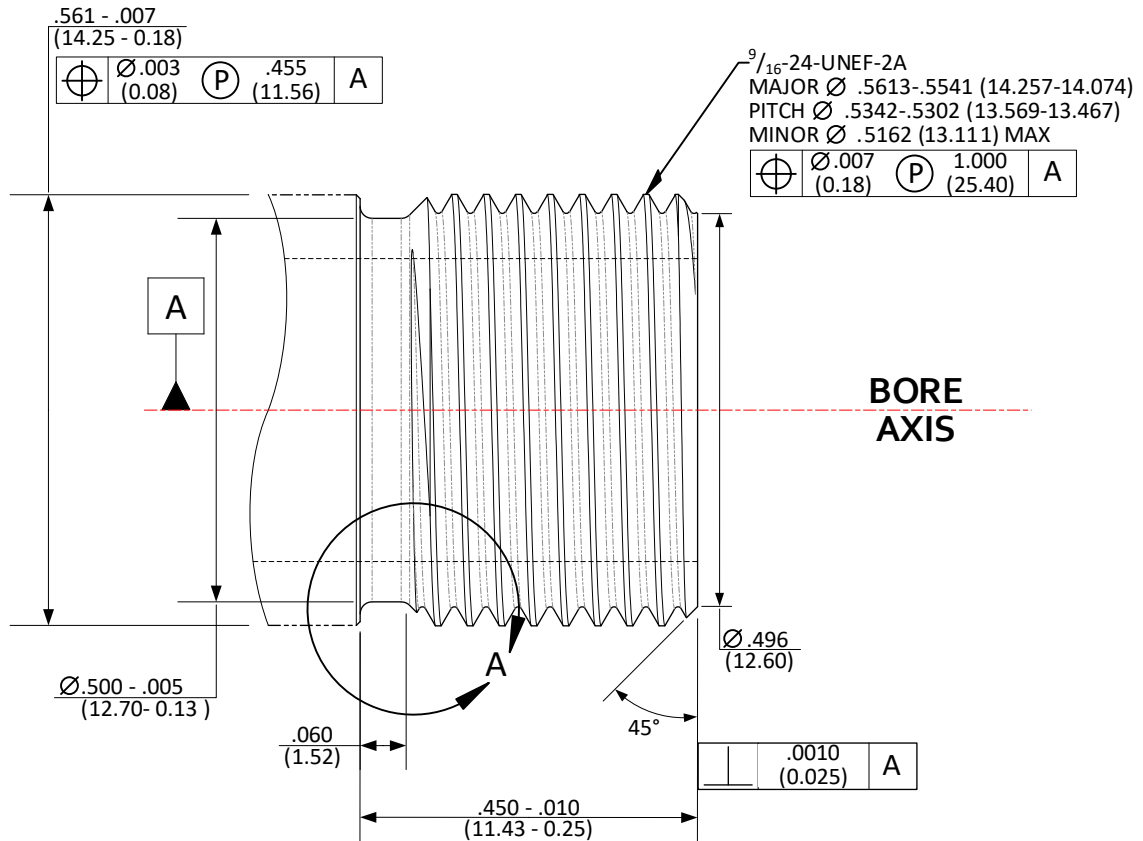

**NOTES:**

DATUM "A" FEATURE IS DEFINED AS THE LAST  $3.0000$  INCHES  $(76.200)$  OF THE BORE AT THE MUZZLE END OF THE BARREL.

(XX.XX) = MILLIMETERS

DRAWING PREPARED USING THE DIMENSIONING CONVENTIONS DEFINED IN ASME Y14.5-2018.

**DO NOT SCALE FROM DRAWING**


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

- .X  $\pm .1$  (3) ANGLES  $\pm 0.5^\circ$
- .XX  $\pm .01$  (0.3) FILLET RADII  $.005-.010$  (0.13-0.25)
- .XXX  $\pm .005$  (0.13) BREAK EDGE  $.005-.010$  (0.13-0.25)
- .XXXX  $\pm .0005$  (0.013) SURFACE FINISH  $\nabla$  ( $\nabla$ )

**CFP&R: .5625-24-UNEF-2A; >.355 (9.02) / ≤.395 (10.03) BORE –  
MUZZLE THREAD RELIEF**

SHEET 2 OF 4

DETAIL A

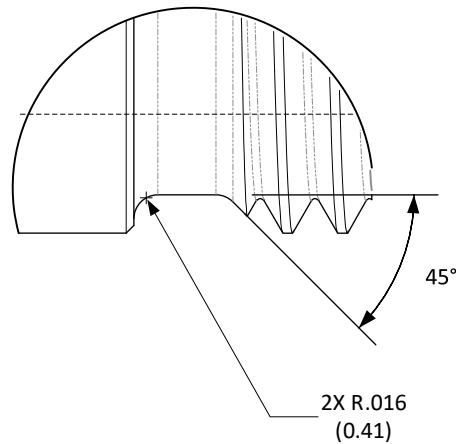

DO NOT SCALE FROM DRAWING

**NOTES:**  
(XX.XX) = MILLIMETERS  
DRAWING PREPARED USING THE DIMENSIONING CONVENTIONS DEFINED  
IN ASME Y14.5-2018.


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

.X ± .1 (3)	ANGLES ± 0.5°
.XX ± .01 (0.3)	FILLET RADII .005-.010 (0.13-0.25)
.XXX ± .005 (0.13)	BREAK EDGE .005-.010 (0.13-0.25)
.XXXX ± .0005 (0.013)	SURFACE FINISH $\sqrt{\text{V}}$ ( $\sqrt{\text{V}}$ )

**CFP&R: .5625-24-UNEF-2A; >.355 (9.02) / ≤.395 (10.03) BORE –  
 EXCLUSION ZONE**

**SHEET 3 OF 4**

AS REFERENCE, THE SHADED AREA REPRESENTS A ZONE INTENDED TO BE RESERVED FOR DEVICES ATTACHED TO THESE THREADS.  
 CONSIDERATION OF INTRUSION INTO THIS VOLUME DURING THE ENTIRE FIRING CYCLE OF THE FIREARM SHOULD BE MADE.

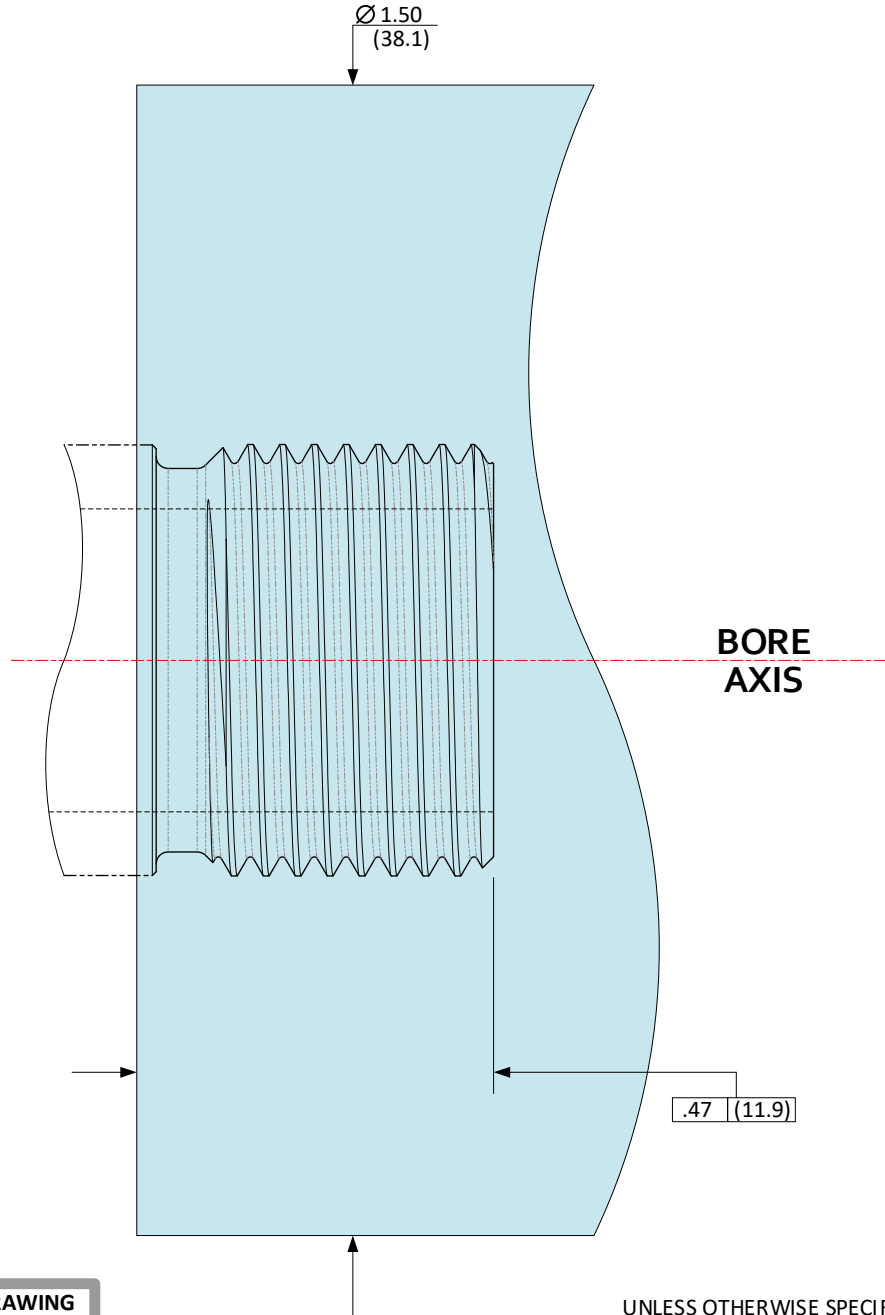


**DO NOT SCALE FROM DRAWING**

**NOTES:**  
 (XX.XX) = MILLIMETERS  
 DRAWING PREPARED USING THE DIMENSIONING CONVENTIONS DEFINED  
 IN ASME Y14.5-2018.

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
 .X ±.1 (3) ANGLES ±0.5°  
 .XX ±.01 (0.3) FILLET RADII .005-.010 (0.13-0.25)  
 .XXX ±.005 (0.13) BREAK EDGE .005-.010 (0.13-0.25)  
 .XXXX ±.0005 (0.013) SURFACE FINISH  $\sqrt{\text{V}}$  ( $\sqrt{\text{V}}$ )

**CFP&R: .5625-24-UNEF-2B; >.355 (9.02) / ≤.395 (10.03) BORE –  
 SOCKET THREADS; MUZZLE INDEXING**

SHEET 4 OF 4

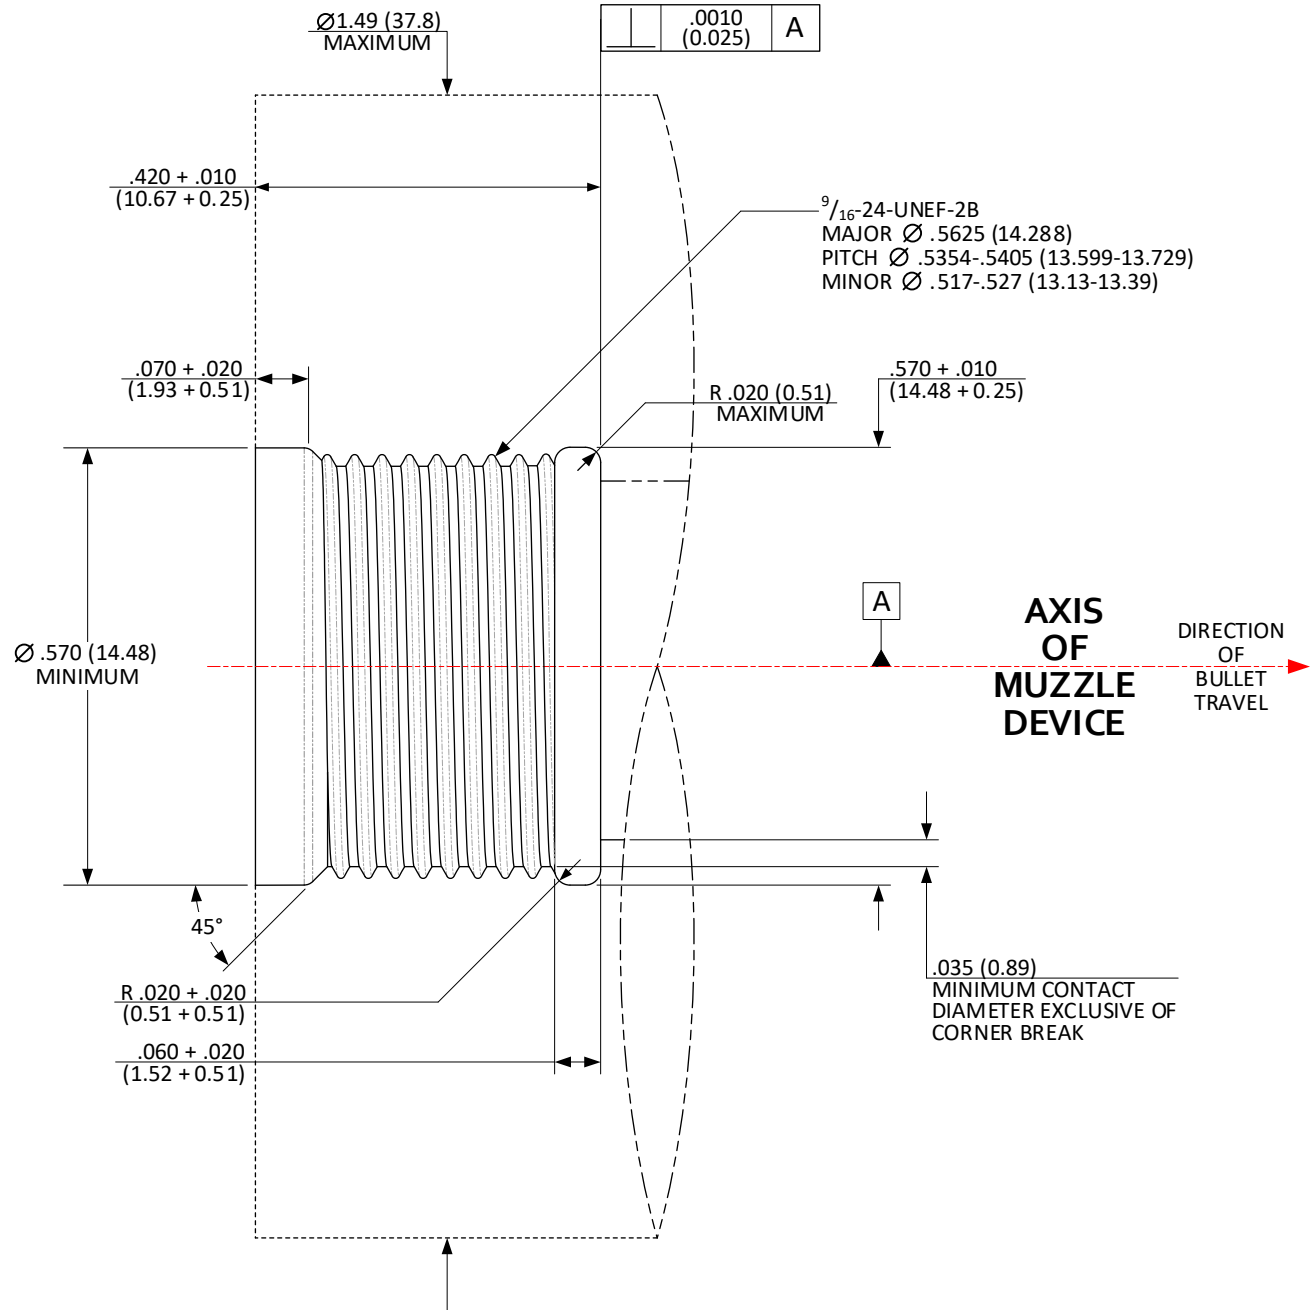

**NOTES:**

The designer shall consider the variables of device length and bore clearance in establishing the necessary positional and orientational tolerances to minimize the likelihood of unintended projectile contact with device internal features.  
 (XX.XX) = MILLIMETERS  
 DRAWING PREPARED USING THE DIMENSIONING CONVENTIONS DEFINED IN ASME Y14.5-2018.

**DO NOT SCALE FROM DRAWING**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

.X	±.1 (3)	ANGLES	±0.5°
.XX	±.01 (0.3)	FILLET RADII	.005-.010 (0.13-0.25)
.XXX	±.005 (0.13)	BREAK EDGE	.005-.010 (0.13-0.25)
.XXXX	±.0005 (0.013)	SURFACE FINISH	$\sqrt{.035 (0.89)}$